


# Gigalink RR-GQ82A 8 Port PoE Switch

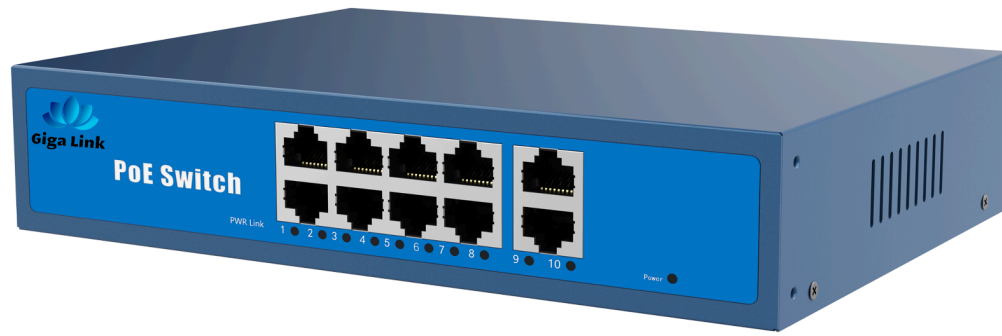

- ✧ 8\*10/100Mbps POE port,2\*100/1000Mbps UP Link port,
- ✧ 250m Distance
- ✧ Support IEEE802.3AF/AT
- ✧ Whole Power:120W(52V 2.3A)
- ✧ All port supported by MDI/MDIX auto flip and self negotiation
- ✧ Supply 8 10/100Mbps adaptive high speed forwarding data packet non-lost port.
- ✧ Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mode.
- ✧ Each port max. power supply reached 30W.

## Application:

- ✧ Wireless Access Point
- ✧ IP Camera
- ✧ IP Phone
- ✧ Computer Networks

## Specifications:

Product	8 Port POE Switch
Model	RR-GQ82A
POE Port	1 to 8 support IEEE802.3AF/AT Standard
Output Power	15.4W/30W IEEE802.3af/at
Power Pin	Both 1/2+, 3/6- and 4/5+7/8-
Whole Power	≤120W (52V 2.3A)
POE Protocol	IEEE 802.3af/IEEE 802.3at
POE Type	End-span
Power Distance	≤250m
Network Standard	IEEE 802.3、IEEE802.3u、802.3x、802.3af/at
Network Medium	10/100BASE-TX:5 class and above non shielded twisted pair
Data Distance	≤250m
Switch Capability	10Gbps
Forwarding Mode	Store and forward
Forwarding Rate	100BASE-tx: 14800pps/port
MAC Address	MAC address table 2K
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
LED Indicator	Each port occupied 1 LINK/ACT.100Mbps, POE Status Indicator, Whole power indicator
Working Environment	Working temperature : -10°-- 55°C
Weight	1kg
Size	200×145×45(L*W*H)mm